

RMC-3000 DATA SHEET



The RMC-3000 automated dosing system uses proprietary technology to optimize odor control dosing in real time, eliminating over and underdosing and significantly reducing chemical costs.

MANUFACTURED IN THE USA.




LIFT & PUMP STATION MONITORING CAPABILITIES

- Chemical Pacing
- Pump Status
- High-Level Float Alarms
- Pump Failure
- Pump Overheat
- High Pressure
- Power Fail

FEATURES

- Real-time alarms and data reporting.
- Cellular-based, offering all ISP carriers via global sim.
- Local Wi-Fi access point.
- GPS with map overview.
- Cloud-based user interface accessible through free App.
- No programming is needed.
- Compact NEMA 4X polycarbonate enclosure.
- Industrial grade electronic componentry.

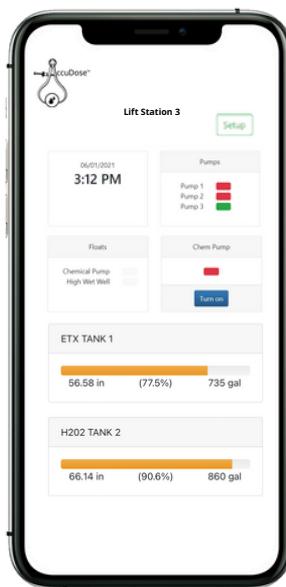

INPUTS AND OUTPUTS



RMC-3000

- 7 Digital Inputs
- 4 Analog Inputs
- 2 Digital Outputs
- 2 Analog Outputs
- 1 Power Fail
- 4 to 20ma Signal Isolator/Splitter

ENGINEERED AND MANUFACTURED IN THE USA

All AccuDose products, including hardware, firmware, software, and server hardware, are engineered and deployed in the United States.

PRODUCT DIMENSIONS

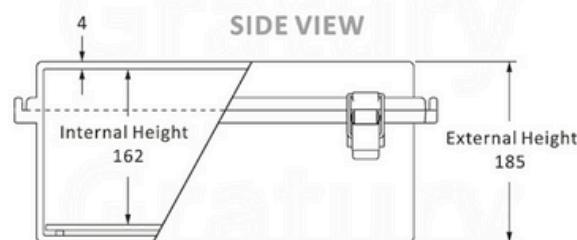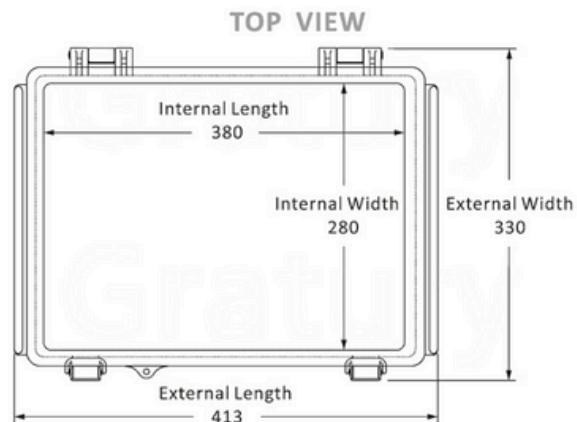

SPECIFICATIONS

Mechanical	
Base	Polycarbonate
Cover	Polycarbonate
Gasket	Continuous silicone
Assembly Screws	Stainless steel
NEMA Rating	1,2,3,3R,3RX,3X,4,4X,5,6,6P,12,13
IP Equivelant	IP65,IP66,IP67,IP68

Electrical	
Power	24V DC + 10%. Power consumption max. 15 Watt
Environment	-20...60° C (-4...140° F)
Digital Inputs	Dry contact to ground
Digital Outputs	24VDC Open collector relay driver output
Analog Inputs	0-20ma,4-20ma,0-3.3vdc, and Pulse Input